

# SCIFP 48V系列



SCIFP4820

48V





## 优势

- 
- 
- 
- /
- 
- 
- BMS


• YD/T 2344

- ISO 9001
- ISO 14001
- OHSAS 18001

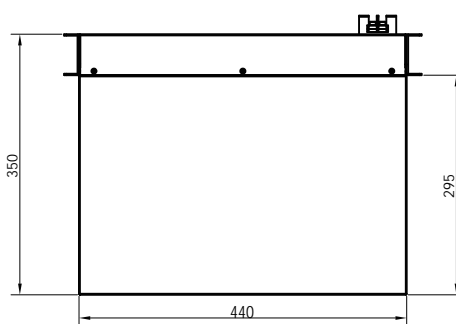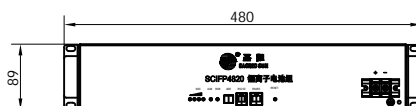


|     |                         |
|-----|-------------------------|
|     | SCIFP4820               |
|     | 51.2V                   |
|     | 20Ah(25 ,0.2C)          |
|     | 1024 Wh                 |
|     | 74.7 Wh/dm <sup>3</sup> |
|     | 60.2 Wh/kg              |
|     | 440mm                   |
|     | 89mm(2U)                |
|     | 350mm                   |
|     | 17.0Kg                  |
|     | 43.2 57.6V              |
|     | 56.0 57.6V              |
|     | 20A                     |
|     | 20A                     |
|     | 99% (+20°C)             |
|     | 94% (+20°C)             |
| ( ) | Modbus/SNMP/TACP        |
|     | / / /                   |
|     | 0°C +55°C               |
|     | -20 +60°C               |
|     | -20°C +60°C             |
|     | IP20                    |


| /V \ /A /h |        |       |       |       |       |       |       |       |       |       |
|------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | 0.1C   | 0.2C  | 0.3C  | 0.4C  | 0.5C  | 0.6C  | 0.7C  | 0.8C  | 0.9C  | 1.0C  |
| 48.0       | 9.465  | 4.852 | 3.250 | 2.418 | 1.924 | 1.588 | 1.355 | 1.179 | 1.039 | 0.939 |
| 46.4       | 9.912  | 4.942 | 3.302 | 2.452 | 1.960 | 1.617 | 1.386 | 1.199 | 1.070 | 0.959 |
| 44.8       | 9.960  | 4.992 | 3.341 | 2.493 | 1.988 | 1.638 | 1.396 | 1.219 | 1.079 | 0.969 |
| 43.2       | 10.099 | 5.039 | 3.355 | 2.507 | 2.000 | 1.658 | 1.405 | 1.229 | 1.089 | 0.979 |

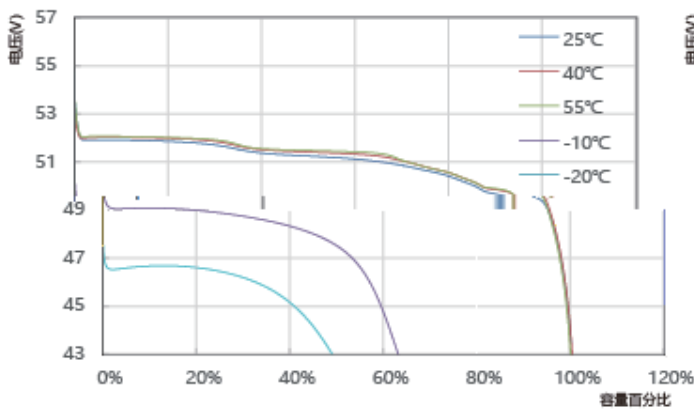


不同温度下放电曲线

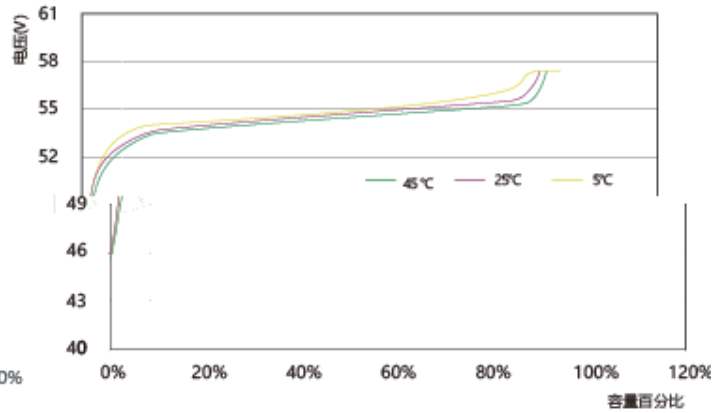


不同温度下充电曲线

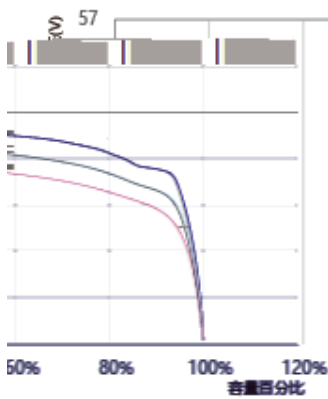

放电曲线 (25°C)

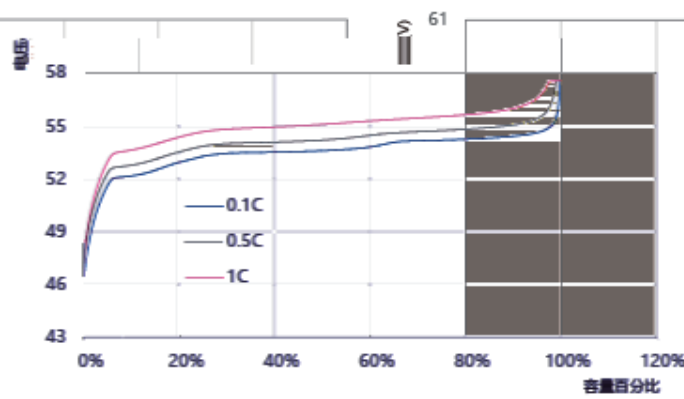

不同倍率下的充电曲线 (25°C)

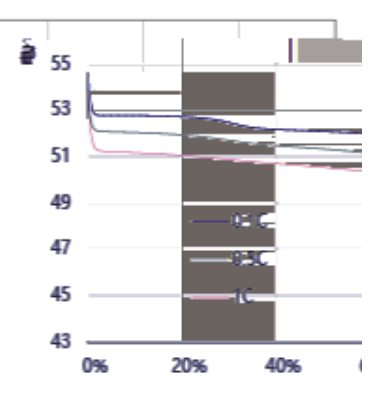

不同倍率下放电曲线