


48V

-
-
-
- /
-
-
- BMS


- a.**
- YD/T 2344

- b. MS**
- ISO 9001
 - ISO 14001
 - OHSAS 18001

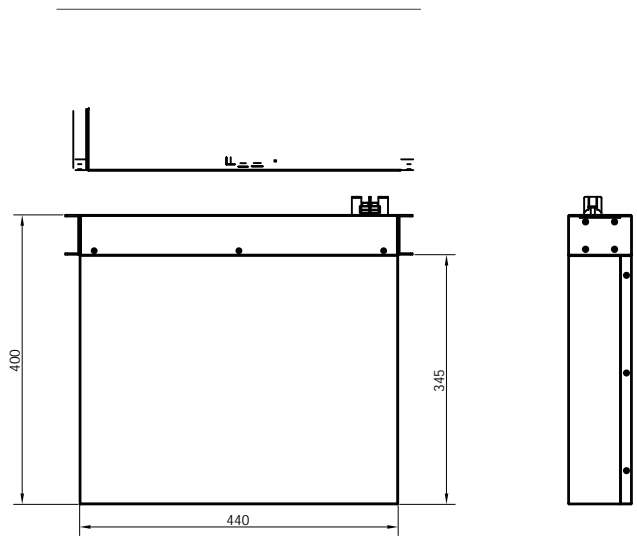


	SCIFP4830
	51.2V
	30Ah(25 ,0.2C)
	1536Wh
	98.1 Wh/dm ³
	74.6 Wh/kg
	440mm
	89mm(2U)
	400mm
	20.6Kg
	43.2 57.6V
	56.0 57.6V
	30A
	30A
	99% (+20°C)
	94% (+20°C)
()	Modbus/SNMP/TACP
	/ / /
	0°C +55°C
	-20 +60°C
	-20°C +60°C
	IP20

(25°C)										
/V \ /h	/A									
	0.1C	0.2C	0.3C	0.4C	0.5C	0.6C	0.7C	0.8C	0.9C	1.0C
48.0	9.465	4.852	3.250	2.418	1.924	1.588	1.355	1.179	1.039	0.939
46.4	9.912	4.942	3.302	2.452	1.960	1.617	1.386	1.199	1.070	0.959
44.8	9.960	4.992	3.341	2.493	1.988	1.638	1.396	1.219	1.079	0.969
43.2	10.099	5.039	3.355	2.507	2.000	1.658	1.405	1.229	1.089	0.979

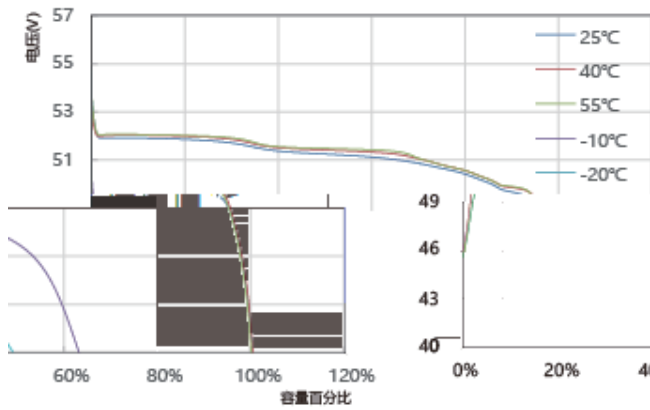


度下放电曲线

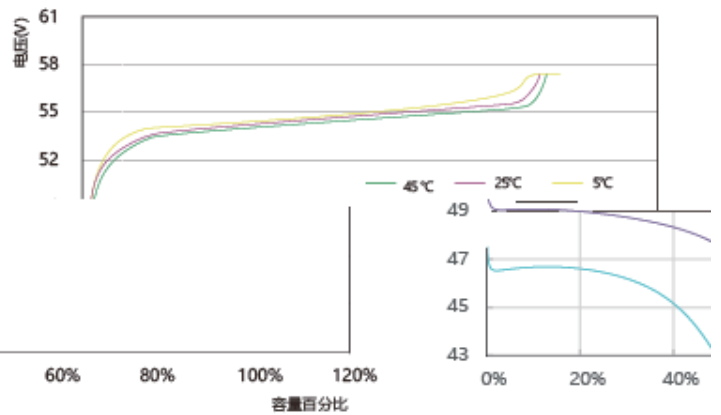


不同温度下充电曲线

不同温

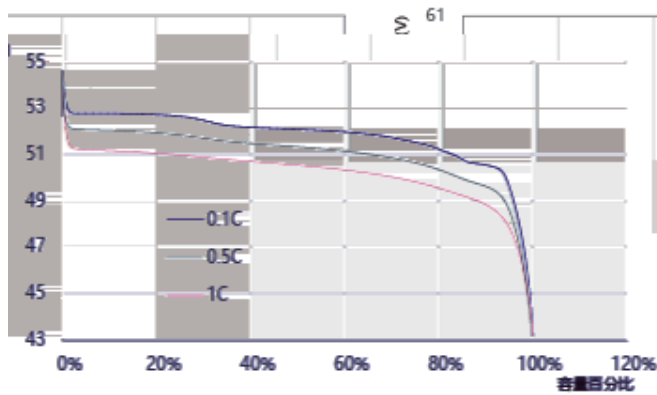

不同倍率下放电曲线 (25°C)

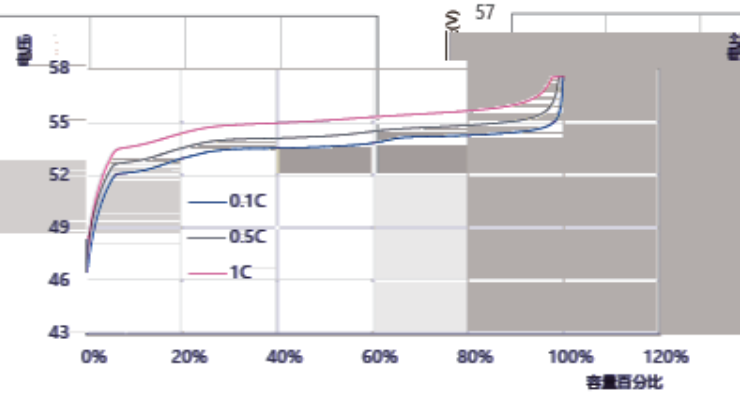

不同倍率下的充电曲线 (25°C)