



SCIFP4850

48V

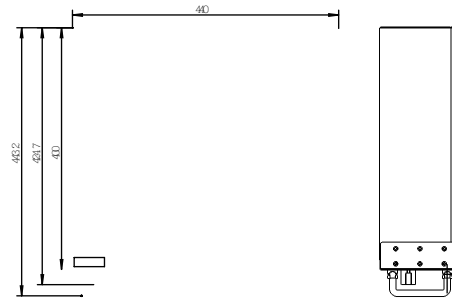

-
-
-
- /
-
-
- BMS




• YD/T 2344


- ISO 9001
- ISO 14001
- OHSAS 18001

	SCIFP4850
	51.2V
	50Ah (25 ,0.2C)
	2560 Wh
	109.4Wh/dm ³
	94.8 Wh/kg
	440mm
	133mm(3U)
	400mm
	约27 Kg
	43.2 57.6V
	56.0 57.6V
	50A
	50A
	99% (+20°C)
	94% (+20°C)
()	RS485
	0°C +55°C
	-20 +60°C
	-20°C +60°C
	IP20


(25)										

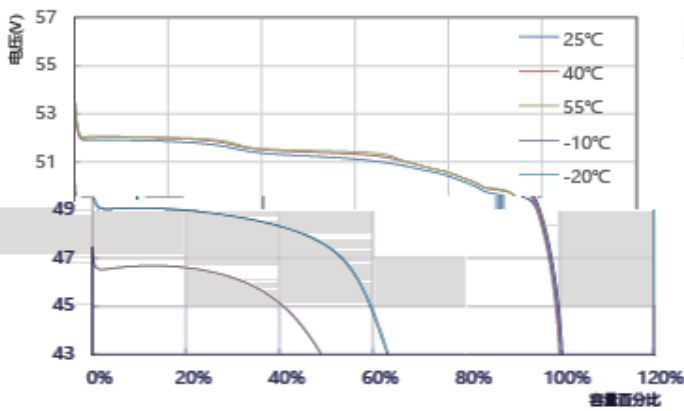


不同温度下放电曲线

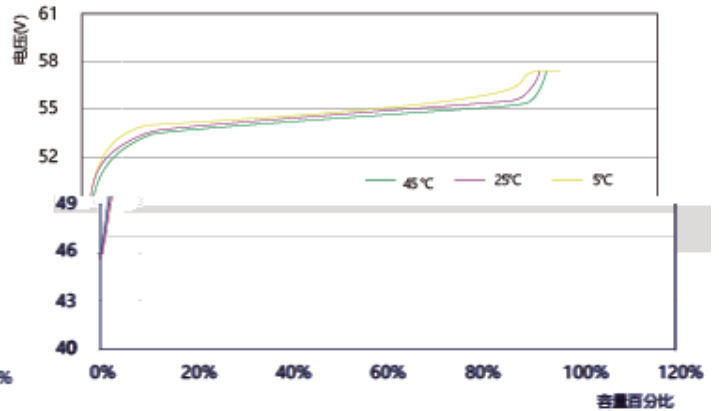


不同温度下充电曲线

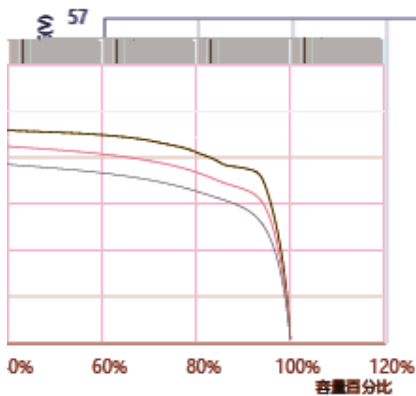

率下放电曲线 (25°C)

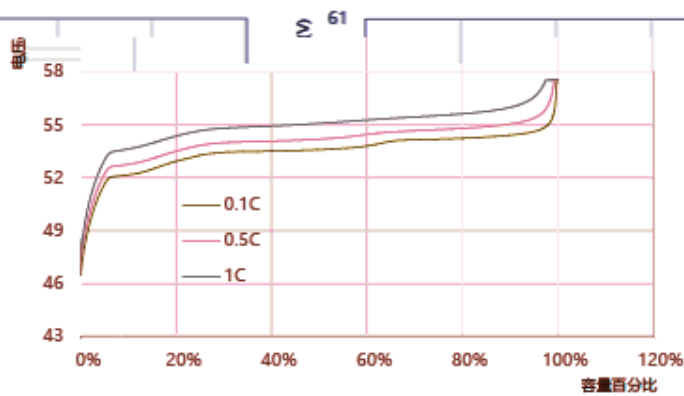

不同倍率下的充电曲线 (25°C)

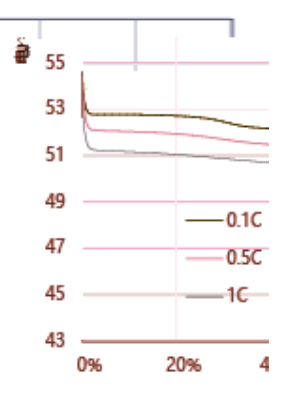

不同倍